

# IX-EN-5592

## X-ray inspection for large sized products


High sensitivity and latest sophisticated X-ray inspection system for large sized products.

Ishida X-ray inspection system IX-EN-5592 can be used at any stage in your production line to identify with the greatest accuracy when foreign bodies are contaminating your product, thus protecting your brand and reassuring your customer.

With an inspection chamber of 550mm wide and 270mm height the IX-EN-5592 can inspect products with large dimensions and weights up to 25kg. The machine offers a cost effective solution for large products without compromise on foreign body detection sensitivity.



Dimensions

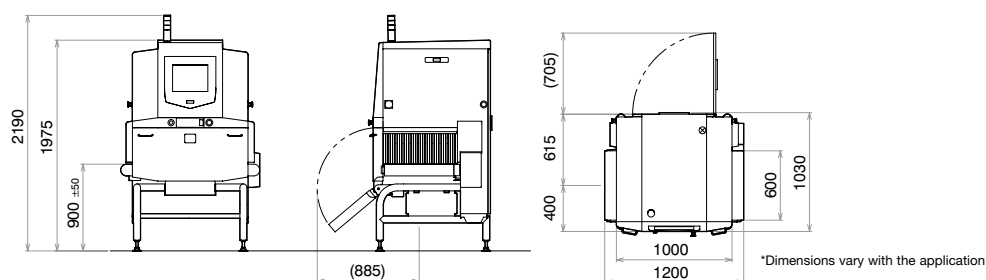

### Specifications

### IX-EN-5592

Tunnel aperture	Width	550mm
	Height	270mm
Construction	Material	SUS304 (Polished surface)
	IP Rate	Conveyor chamber: IP66 / Enclosure: IP54 (IP65, option) (*1)
Machine dimensions		1200mm(L) x 1030mm(W) x 1975mm(H) (*2) (Floor to Signal Tower: 2190mm)
Machine weight		500kg
Conveyor	Dimensions	1200mm(L) x 600mm(W)
	Belt height	900mm +/- 50mm (*3)
	Speed	5-30m/min (optional 10-60m/min) (*4)
	Loaded weight	25kg (30kg is optional) (*4)
Product length		1000mm (*5)
Minimum spacing between products		30mm (*5)
Power supply		Single phase: AC200-240V 50/60Hz 900W (*6)
X-ray	Tube voltage	30-90kV
	Tube current	1-3mA
	Output	Max: 150W
Line sensor		0.6mm
X-ray protection		Protective curtains (*7)
X-ray emissions		Machine meets local regulations
Working environment	Temperature	0-33°C (*8)
	Humidity	30-85%RH

Ishida Europe pursues a policy of continual improvement due to technical development. We therefore reserve the right to deviate from information and specifications in this publication without notice.

(\*1) Except the cooling unit.

(\*2) This dimension shall be applied in case of 900mm belt height.

(\*3) Other heights optional.

(\*4) In the case where higher weight or speed options are selected other specifications may vary.

(\*5) This dimension should be followed under Snap-Mode only. In case of Bulk-Mode, not applied.

(\*6) There are cases that input voltage is fixed depending on integrated rejector unit or optional unit. 900W is applied where there is no specific ancillary.

(\*7) The material of protection curtain is tungsten, and curtain is detachable.

(\*8) If the room is hotter than 33°C, the air conditioner shall be arranged as a chargeable option. In this case, the maximum temperature is 40°C.

Technical information is based upon information available at the time of Print - 05/2018. Confirmation is provided via Sales enquiry. Photographs and application shots may not be exact representations.

# Ishida Global standard X-ray series

## Benefits of an X-ray inspection system

X-ray inspection has several key benefits, especially for food producers, that are fundamentally linked to safety and quality:

### Brand protection

- ▲ Customers will trust the product

### Food safety

- ▲ The food is free of foreign bodies and safe to eat


### Cost savings due to no product recalls and customer complaints

- ▲ Fewer recalls and customer complaints lead to less fines

### Can do much more than just finding foreign bodies:

- ▲ Counting components
- ▲ Weight estimation
- ▲ Checking fill level
- ▲ Detecting flaws such as missing or broken items
- ▲ Measuring product size
- ▲ Sealing control

All these functions in one machine lead to a cost-effective and efficient performance



### Inspection area

The figures show the permissible inspection range. Portions of the product which are not within the shaded area are not irradiated.

(\*1) The inspection width against the height is approximate value.

Product Size (mm)	
Height (*1)	Width
0	550
10	542
20	535
30	528
40	521
50	514
60	507
70	500
80	493
90	486
100	479
110	472
120	465
130	458
140	451
150	444
160	437
170	430
180	423
190	416
200	409
210	402
220	395
230	388
240	381
250	373
260	366
270	359

## Ishida X-ray integrated solutions

Our systems are ergonomically designed, from the reject bin position to the different types of reject units, to be easily integrated into your production line without disruption.



**ISHIDA EUROPE LIMITED**  
Kettles Wood Drive  
Woodgate Business Park  
Birmingham  
B32 3DB  
United Kingdom  
Tel: +44 (0)121 607 7700  
Fax: +44 (0)121 607 7888  
info@ishidaeurope.com

**ISHIDA CZECH REPUBLIC**  
Tel: +420 317 844 059  
Fax: +420 317 844 052  
info@ishidaeurope.cz

**ISHIDA ROMANIA**  
Tel: +40 (0)21 589 73 52  
Fax: +40 (0)21 310 34 22  
info@ishidaeurope.ro

**ISHIDA FRANCE**  
Tel: +33 (0)1 48 63 83 83  
Fax: +33 (0)1 48 63 24 29  
info@ishidaeurope.fr

**ISHIDA RUSSIA AND CIS**  
Tel: +7 499 272 05 36  
Fax: +7 499 272 05 37  
info@ishidaeurope.ru

**ISHIDA GERMANY**  
Tel: +49 (0)791 945 160  
Fax: +49 (0)791 945 1699  
info@ishida.de

**ISHIDA SOUTH AFRICA**  
Tel: +27 (0)11 976 2010  
Fax: +27 (0)11 976 2012  
info@ishidaeurope.com

**ISHIDA MIDDLE EAST**  
Tel: +971 (0)4 299 1933  
Fax: +971 (0)4 299 1955  
ishida@ishida.ae

**ISHIDA SWITZERLAND**  
Tel: +41 (0)41 799 7999  
Fax: +41 (0)41 790 3927  
info@ishida.ch

**ISHIDA NETHERLANDS**  
Tel: +31 (0)499 39 3675  
Fax: +31 (0)499 39 1887  
info@ishida.nl