

IX-EN-2463


Latest X-ray inspection technology offers an easy investment choice to entry level users

Using the latest in X-ray technology, this system is the most affordable choice for ensuring product quality. This model is most purposeful in handling light, thin products, possessing the required sensitivity to accurately detect faults and contaminants.

- ▲ Reliable inspections suitable for uniform products
- ▲ Easy to set up and integrate into your production line
- ▲ User-friendly 15" touch screen control



Dimensions

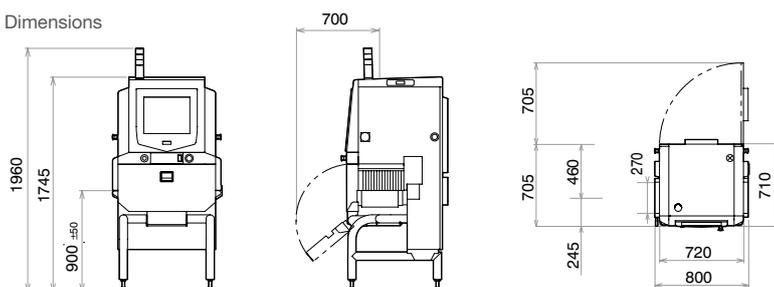
Specifications
IX-EN-2463

Tunnel aperture	Width	240mm
	Height	150mm
Construction	Material	SUS304 (Polished surface)
	IP Rate	Conveyor chamber: IP66 / Enclosure: IP54 (IP65, option) (*1)
Machine dimensions	800mm(L) x 710mm(W) x 1745mm(H) (*2) (Floor to Signal Tower: 1960mm)	
Machine weight	250kg	
Conveyor	Dimensions	800mm(L) x 270mm(W) (1800mm optional (L))
	Belt height	900mm +/- 50mm (*3)
	Speed	10-60m/min (optional 90m/min) (*4)
	Loaded weight	5kg (higher weight is optional) (*4)
Product length	20~450mm (optional 1000mm) (*5)	
Minimum spacing between products	30mm (*5)	
Power supply	Single phase: AC200-240V 50/60Hz 450W (*6)	
X-ray	Tube voltage	30/35/40/45/50kV
	Tube current	1mA
	Output	Max: 50W
Line sensor	0.4mm	
X-ray protection	Protective curtains (*7)	
X-ray emissions	Machine meets local regulations	
Working environment	Temperature	0-33°C (*8)
	Humidity	30-85%RH

Ishida Europe pursues a policy of continual improvement due to technical development. We therefore reserve the right to deviate from information and specifications in this publication without notice. Ishida Europe shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

(*1) Except the cooling unit.

(*2) This dimension shall be applied in case of 900mm belt height.

(*3) Other heights optional.

(*4) In the case where higher weight or speed options are selected other specifications may vary.

(*5) This dimension should be followed under Snap-Mode only. In case of Bulk-Mode, not applied.


(*6) There are cases that input voltage is fixed depending on integrated rejector unit or optional unit. 450W is applied where there is no specific ancillary.

(*7) The material of protection curtain is tungsten, and curtain is detachable.

(*8) If the room is hotter than 33°C, the air conditioner shall be upgraded as a chargeable option. In this case, the maximum temperature is 40°C.

Technical information is based upon information available at the time of Print - 06/2018. Confirmation is provided via Sales enquiry. Photographs and application shots may not be exact representations.

Ishida Global standard X-ray series

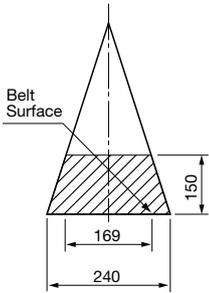

Inspection area

The figures show the permissible inspection range. Portions of the product which are not within the shaded area are not irradiated.

Product Size (mm)	
Height (*1)	Width
0	240
10	232
20	225
30	217
40	210
50	202
60	195
70	188
80	180
90	173
100	165
110	158
120	150
130	143
140	136
150	128

(*1) The inspection width against the height is approximate value.

Ishida X-ray integrated solutions

Our systems are ergonomically designed, from the reject bin position to the different types of reject units, to be easily integrated into your production line without disruption.

Benefits of an X-ray inspection system

X-ray inspection has several key benefits, especially for food producers, that are fundamentally linked to safety and quality:

Brand protection

- ▲ Customers will trust the product

Food safety

- ▲ The food is free of foreign bodies and safe to eat


Cost savings due to no product recalls and customer complaints

- ▲ Fewer recalls and customer complaints lead to less fines

Can do much more than just finding foreign bodies:

- ▲ Counting components
- ▲ Weight estimation
- ▲ Checking fill level
- ▲ Detecting flaws such as missing or broken items
- ▲ Measuring product size
- ▲ Sealing control

All these functions in one machine lead to a cost-effective and efficient performance

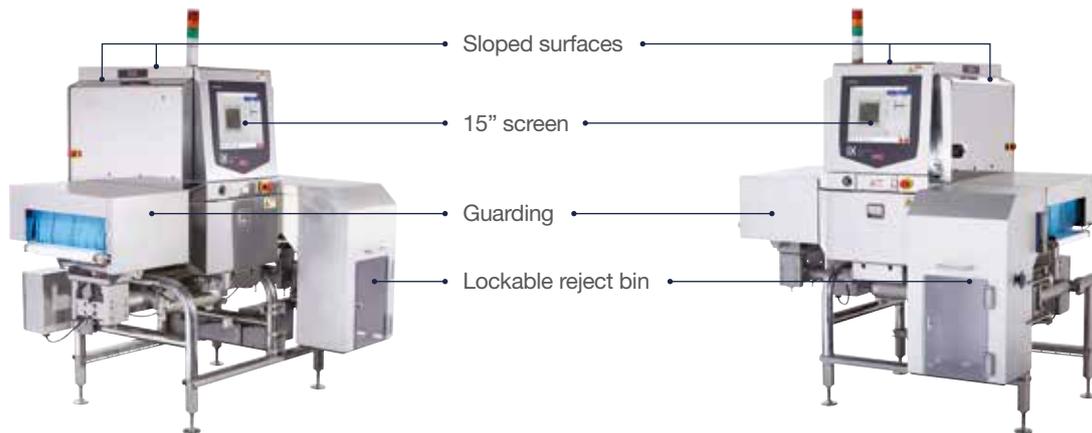

ISHIDA EUROPE LIMITED
Kettles Wood Drive
Woodgate Business Park
Birmingham
B32 3DB
United Kingdom
Tel: +44 (0)121 607 7700
Fax: +44 (0)121 607 7888
info@ishidaeuropa.com

ISHIDA CZECH REPUBLIC
Tel: +420 317 844 059
Fax: +420 317 844 052
info@ishidaeuropa.cz

ISHIDA ROMANIA
Tel: +40 (0)21 589 73 52
Fax: +40 (0)21 310 34 22
info@ishidaeuropa.ro

ISHIDA FRANCE
Tel: +33 (0)1 48 63 83 83
Fax: +33 (0)1 48 63 24 29
info@ishidaeuropa.fr

ISHIDA RUSSIA AND CIS
Tel: +7 499 272 05 36
Fax: +7 499 272 05 37
info@ishidaeuropa.ru

ISHIDA GERMANY
Tel: +49 (0)791 945 160
Fax: +49 (0)791 945 1699
info@ishida.de

ISHIDA SOUTH AFRICA
Tel: +27 (0)11 976 2010
Fax: +27 (0)11 976 2012
info@ishidaeuropa.com

ISHIDA MIDDLE EAST
Tel: +971 (0)4 299 1933
Fax: +971 (0)4 299 1955
ishida@ishida.ae

ISHIDA SWITZERLAND
Tel: +41 (0)41 799 7999
Fax: +41 (0)41 790 3927
info@ishida.ch

ISHIDA NETHERLANDS
Tel: +31 (0)499 39 3675
Fax: +31 (0)499 39 1887
info@ishida.nl