



# IX-G2-4027-H

Ishida's second generation X-ray inspection system achieves superior performance

Ishida's G2 offers; superior brand protection and quality control; our state of the art energy analysis offers supreme detection sensitivity. The advanced G2 performs to the highest accuracy, efficiency and reliability to deliver a sustainable return on investment. Ishida is a well respected leading edge X-Ray Manufacturer with well over a century of food industry experience resulting in a very large global installed product base.

## Detecting the full range of contaminants

The G2 technology enables higher detection rates for calcified bones, stones, shells and of course metals, glass, and dense plastics like rubber, improving the accuracy with which contaminants can be found, especially soft contaminates where the products can overlap.

## Simple operation, low maintenance

Operation, via a 17" colour touchscreen, is extremely intuitive resulting in easy to learn and use, saving time in training and day to day operation. Settings can be automatically optimised and routine recalibration is not required, removing the need to stop the machine reducing production downtime. The system is designed to speed up product changeovers by facilitating rapid tool less cleaning, while the sealed construction of its vital parts resists dust and moisture, ensuring long-term accuracy, reliability and reducing operational costs.

## Quality Control

Simultaneously check for fill level, missing items, damaged products, weight estimation and package integrity to protect your brand reputation and increase customer satisfaction.

## Linking seamlessly into your data systems

The IX-G2 system provides you with secure data integrity as all records can be easily retrieved. Peace of mind is also important particularly with regard to the storage of data, operational logs and images all of which are automatically stored with a date/ time stamp making the auditing process easier. All data can be saved and is accessible using standard PC applications. The system has an Ethernet option for integration into your enterprise wide quality and traceability systems.



## Not just another machine

120 years of supplying weighing and quality control equipment within an ever changing global market demonstrates Ishida's continuous approach to innovation and our ongoing commitment in providing our customers with industry leading product solutions. Ishida also brings a wealth of experience, global service support network, training and a customer focussed approach. You are not just buying a machine for your application you are buying an Ishida machine, a machine you can rely upon from a company that you can rely upon for now and in the future.



# IX-G2 Dimensions and Specifications

## Dimensions - IX-G2-4027-H

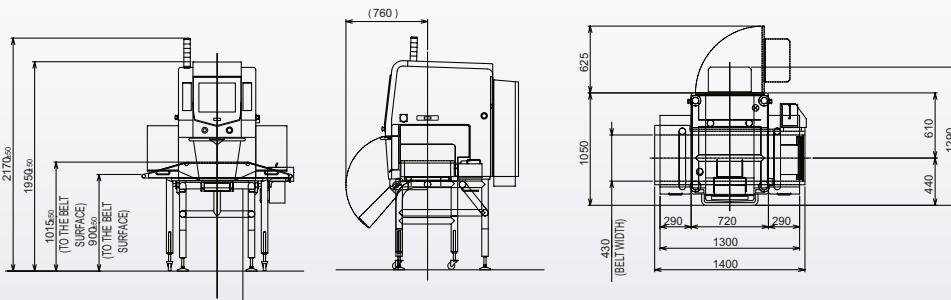

### Inspection area

The figures show the permissible inspection range. Portions of the product which are not within the shaded area are not irradiated.

Height*	Width
	IX-G2-247
0mm	380mm
10mm	382mm
20mm	374mm
30mm	366mm
40mm	358mm
50mm	350mm

\*The inspection widths against the height are approximate values.

Item	Specification
<b>Model</b>	<b>IX-G2-4027-H</b>
Inspection range	Length: 20 to 450mm (snap mode) Interval between inspection objects: 30mm
	Width: 390mm
	Height: 50mm
Inspection conveyor dimension	Length: 1400mm
	Width: 430mm
	Height: Height to belt 900mm (+/-50mm)
Transfer speed	5 to 41 m/min
Transfer weight	Max. 5kg (Standard)
X-ray output	Max. 350W / 100 kV / 5mA
Operating section	17" TFT LCD Touch screen Windows-XP OS
Number of items that can be preset	100 items
Machine Outside Dimension	1400mm (L) x 1290mm (D) x 2170mm (H)
Machine weight	470kg (excluding option)
Machine Material & Finish	Stainless Steel (SUS304) in bead blast finish
Machine Protective construction	IP66 (conveyor room) IP65 (outside conveyor room)
Cooling Method	Hermetical Air Cooling
X-ray protection	Protective stainless steel plate (rapidly detachable) + Protection guards
X-ray leakage radiation dose	1uSv/h or less (including conveyor transfer entrance)
Power supply	Single phase AC200-240V, 50/60 Hz, +/- 10%
Operation Environment	Temperature: 0 to 35 degree Humidity: 30 to 85%RH (without condensation)

The specification described here is that for a single unit of equipment.

### ISHIDA EUROPE LIMITED

Kettles Wood Drive  
Woodgate Business Park  
Birmingham  
B32 3DB  
United Kingdom  
Tel: +44 (0)121 607 7700  
Fax: +44 (0)121 607 7888  
info@ishidaeurope.com

### ISHIDA CZECH REPUBLIC

Tel: +420 317 844 059  
Fax: +420 317 844 052  
info@ishidaeurope.cz

### ISHIDA ROMANIA

Tel: +40 (0)21 589 73 52  
Fax: +40 (0)21 310 34 22  
info@ishidaeurope.ro

### ISHIDA FRANCE

Tel: +33 (0)1 48 63 83 83  
Fax: +33 (0)1 48 63 24 29  
info@ishidaeurope.fr

### ISHIDA RUSSIA AND CIS

Tel: +7 499 272 05 36  
Fax: +7 499 272 05 37  
info@ishidaeurope.ru

### ISHIDA GERMANY

Tel: +49 (0)791 945 160  
Fax: +49 (0)791 945 1699  
info@ishida.de

### ISHIDA SOUTH AFRICA

Tel: +27 (0)11 976 2010  
Fax: +27 (0)11 976 2012  
info@ishidaeurope.com

### ISHIDA MIDDLE EAST

Tel: +971 (0)4 299 1933  
Fax: +971 (0)4 299 1955  
ishida@ishida.ae

### ISHIDA SWITZERLAND

Tel: +41 (0)41 799 7999  
Fax: +41 (0)41 790 3927  
info@ishida.ch

### ISHIDA NETHERLANDS

Tel: +31 (0)499 39 3675  
Fax: +31 (0)499 39 1887  
info@ishida.nl